


## VMB2BLE datasheet

Two-channel blind control module with extended possibilities for DIN rail

2-Channel shutter or sunblind module with 105 modes.

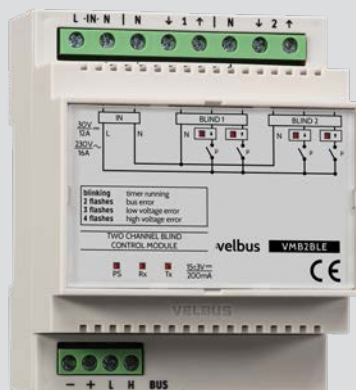

### Features

- can be used to control an electric roll-down shutter, sunblind...
- manual control on the module
- controllable through VELBUS (no direct input for push buttons)
- programmable with PC
- feedback towards the control modules
- address is set electronically
- 105 modes: up, down, up/down, set to position, force, inhibit, ...
- LED indicators for:
  - UP and DOWN relay outputs
  - UP and DOWN operation modes
  - power voltage
  - data reception and forwarding through VELBUS

### Specifications

250 possible addresses

time-out	programmable per channel (1s to 5m34s, or continuously on)
relay contacts	16 A / 230 VAC max.; 12 A / 24 VDC max
power supply	15±3VDC
power consumption	200mA
dimensions	90 x 71 x 58mm / 3.6 x 2.8 x 2.3"
width	4 DIN modules
modes	105

Protocol manuals for developers: available for download at <https://github.com/velbus>

#### VELBUS • VMB2BLE

Legen Heirweg 33 • 9890 Gavere • Belgium  
velbus.eu