


VMB1BLS datasheet

Single channel blind control module for universal mounting

1-Channel shutter or sunblind module for universal mounting.

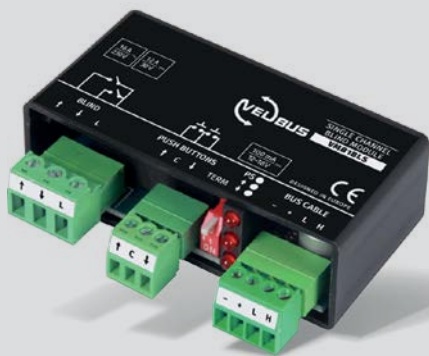

Features

- controllable through the Velbus system or with 2 push buttons
- programmable time-out
- module sends feedback to the control modules
- LED indications for:
 - upward and downward modes
 - supply voltage
- universal mount (for example in shutter box, etc.)
- 250 possible addresses

Specifications

fixed firmware (not upgradable)

relay contact	16 A / 230 VAC max.; 12 A / 24 VDC max
supply voltage	15±3VDC
dimensions	72 x 59 x 24 mm
consumption	100 mA max.

Protocol manuals for developers: available for download at <https://github.com/velbus>

VELBUS • VMB1BLS

Legen Heirweg 33 • 9890 Gavere • Belgium
velbus.eu